

Sirocco 2x1000w halogen


Versatile lighting balloon

> The simplest

Airstar, the inventor and world leader of lighting balloon technology, offers a complete range of products to meet all your construction lighting needs. Airstar lights are diffused, glare-free and illuminate a 360° area.

The Sirocco 2x1000w halogen lighting balloon is designed to offer an easy and efficient lighting solution.

This is the simplest and most versatile product of the Sirocco range.

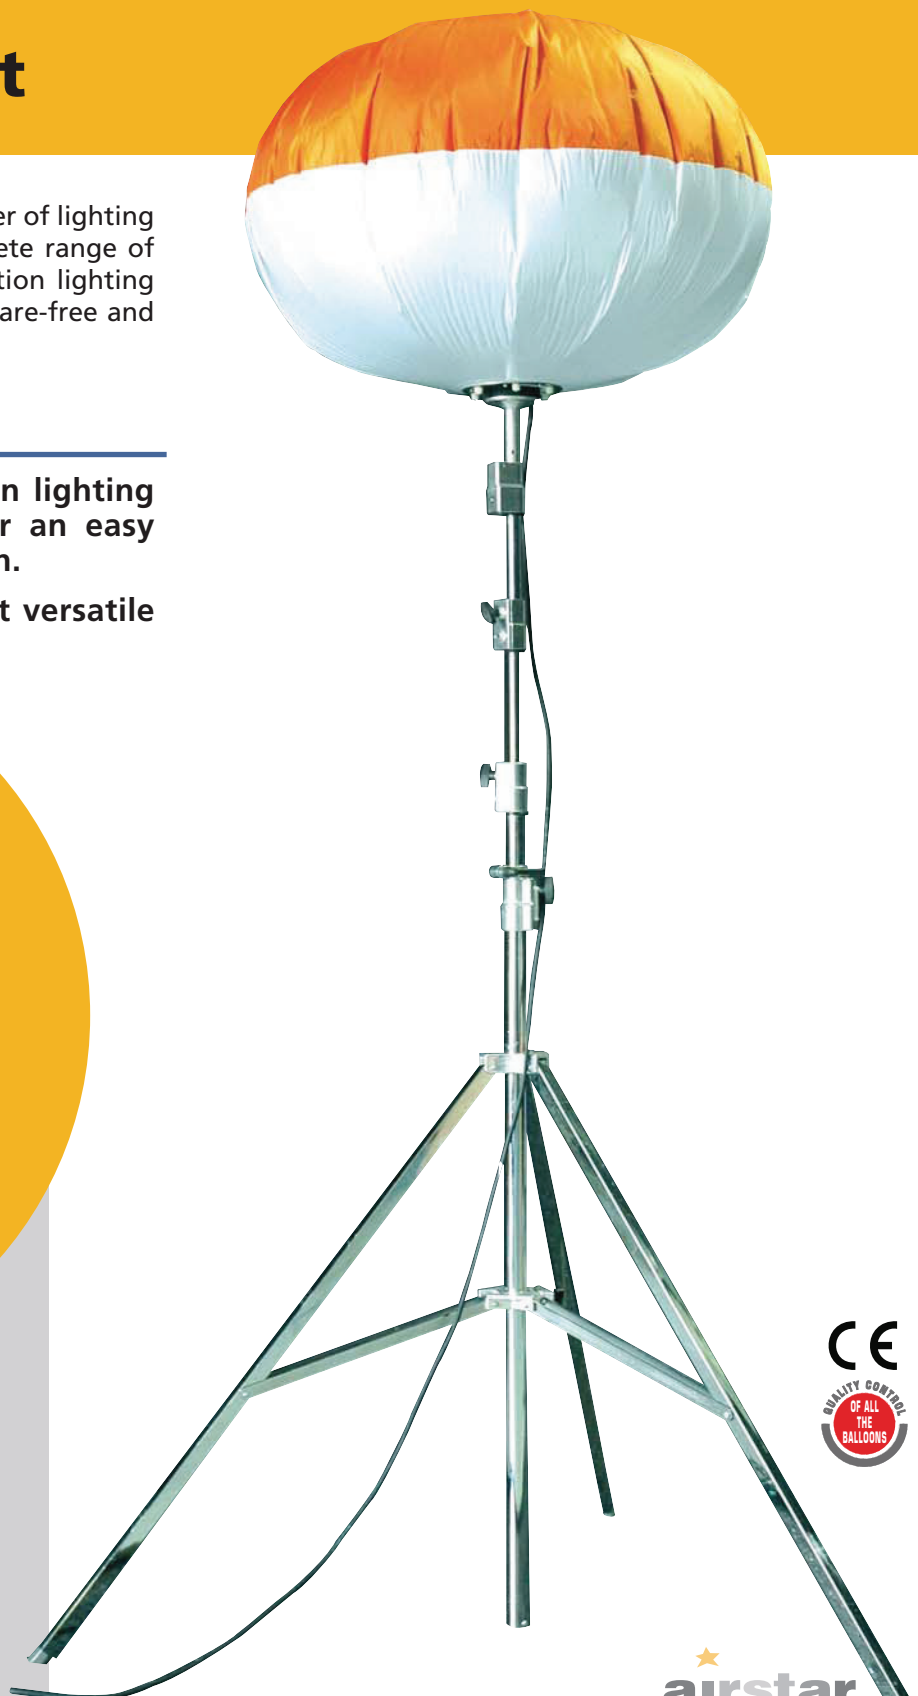

airstar
space lighting


Sirocco 2x1000w halogen - Versatile lighting balloon

SELF-INFLATING LIGHTING BALLOON

- > **Quick and easy to set up**
- > **Efficient:** diffuses a powerful soft light due to halogen lamps
- > **Versatile:** can be mounted on a stand or adapted to any equipment
- > **Lightweight:** packed into a container, small enough to be carried in a car


The balloon

- 110cm (3.6ft) in diameter
- Self-inflated by an internal fan
- The integrated reflector offers optimal light output
- The elliptical shape offers a higher wind resistance: up to 100km/h (62 mph)
- A stem at the base of the envelope is used to adapt the balloon to a stand



The light

The balloon offers an optimal light between 2.5 and 5m (8.2ft / 16.4ft)

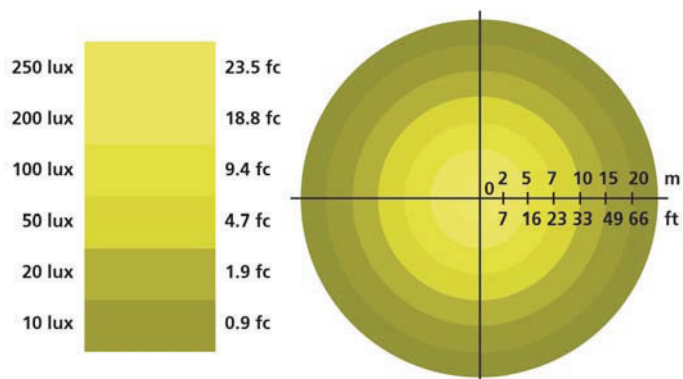

	R7s 230v	R7s 100v/120v
Lighted area	1500m ² 16200sq.ft	1500m ² 16150sq.ft
Light under the balloon at a 5-m (16.4ft) height	282Lx	282Lx
Lighted area with at least 10 lux	500m ² 5400sq.ft	500m ² 5400sq.ft
Maximum lumen	54000Lm	54000Lm
Color temperature	3200°K	3200°K

Quick and easy set up

- Plug
- The balloon inflates and lights in 45 seconds
- Set up time is 5 minutes maximum for one person

Safety and reliability

- IP53 balloon
- The texture of the envelope is non flammable
- The volume of the balloon keeps the envelope cold and allows to handle it without being burnt
- A safety system switch turns the power off if the internal pressure is reduced

Easy transport and storage

- In a plastic cylinder: 110*30*30cm (3.6*1*1ft)
- Total weight of the balloon: 8kg (17.6lbs)



Electrical features

	230v	100v/120v
Type of lamp holder	R7s	R7s
R7s Lamps	2x1000w	2x1000w
Type of lamps	Halogen	Halogen
Power cables	3G1.5	3G2.5
Average lamps life	300h	300h
Power supply protection	1x10A fuse	1x20A fuse
Efficiency	27Lm/w	27Lm/w
Required generator	2.4kw	2.4kw

Mounting option

- Telescopic pole in chrome steel to mount the balloon on an equipment
- Telescopic stand + tripod or flat stem for stand alone on the ground

Available accessories

- Bag for envelope storage
- Ballast sandbag
- White envelope
- Inverted envelope
- Oversized envelope for a logo
- Pack of lamps
- Titling head device

